

552348

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/089133 A1

(51) International Patent Classification⁷: **A41D 27/08,**
29/00

(21) International Application Number:
PCT/AU2004/000470

(22) International Filing Date: 8 April 2004 (08.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003203641 10 April 2003 (10.04.2003) AU

(71) Applicant and

(72) Inventor: **JOHNSTONE, Russell** [AU/AU]; 84 Bowen
Road, East Doncaster, VIC 3109 (AU).

(74) Agent: **WATERMARK PATENT & TRADEMARK
ATTORNEYS**; 290 Burwood Road, Hawthorn, VIC 3122
(AU).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:
— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **EPAULETTE**

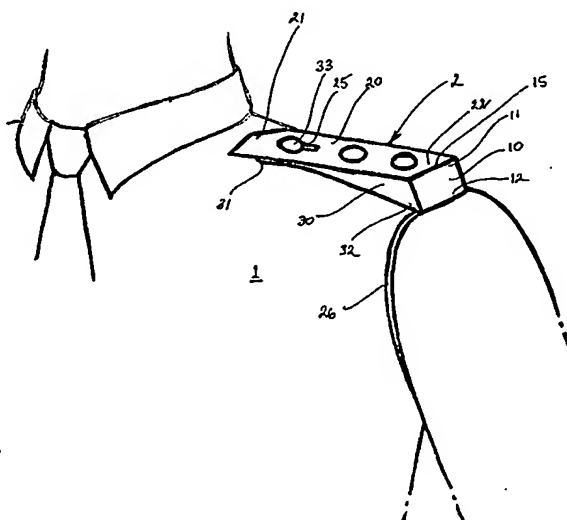

(57) Abstract: The invention provides an epaulette (2) for securing to a garment (1), which provides improved uniformity of ap-
pearance when worn by people with a range of shoulder widths and slopes. The epaulette (2) includes: a first part (10) securable to
a garment (1) with a lower section of the first part in a first position at or adjacent to a shoulder area of the garment; and an elongate
second part (20) securable to the garment at a second position thereon and that in use of the epaulette is laterally inward of said first
position. The first and second parts (10 and 20) are joined by a hinge (15) that in use of the epaulette is laterally outward of the
second position and above the first position on the garment. The epaulette preferably includes an elongate third part (30) secured to
the first part (10) and secured to an underside of the second part (20) by attachment means (33, 26) at an attachment position on the
second part that in use of the epaulette is laterally inward of the hinge (15).

WO 2004/089133 A1